


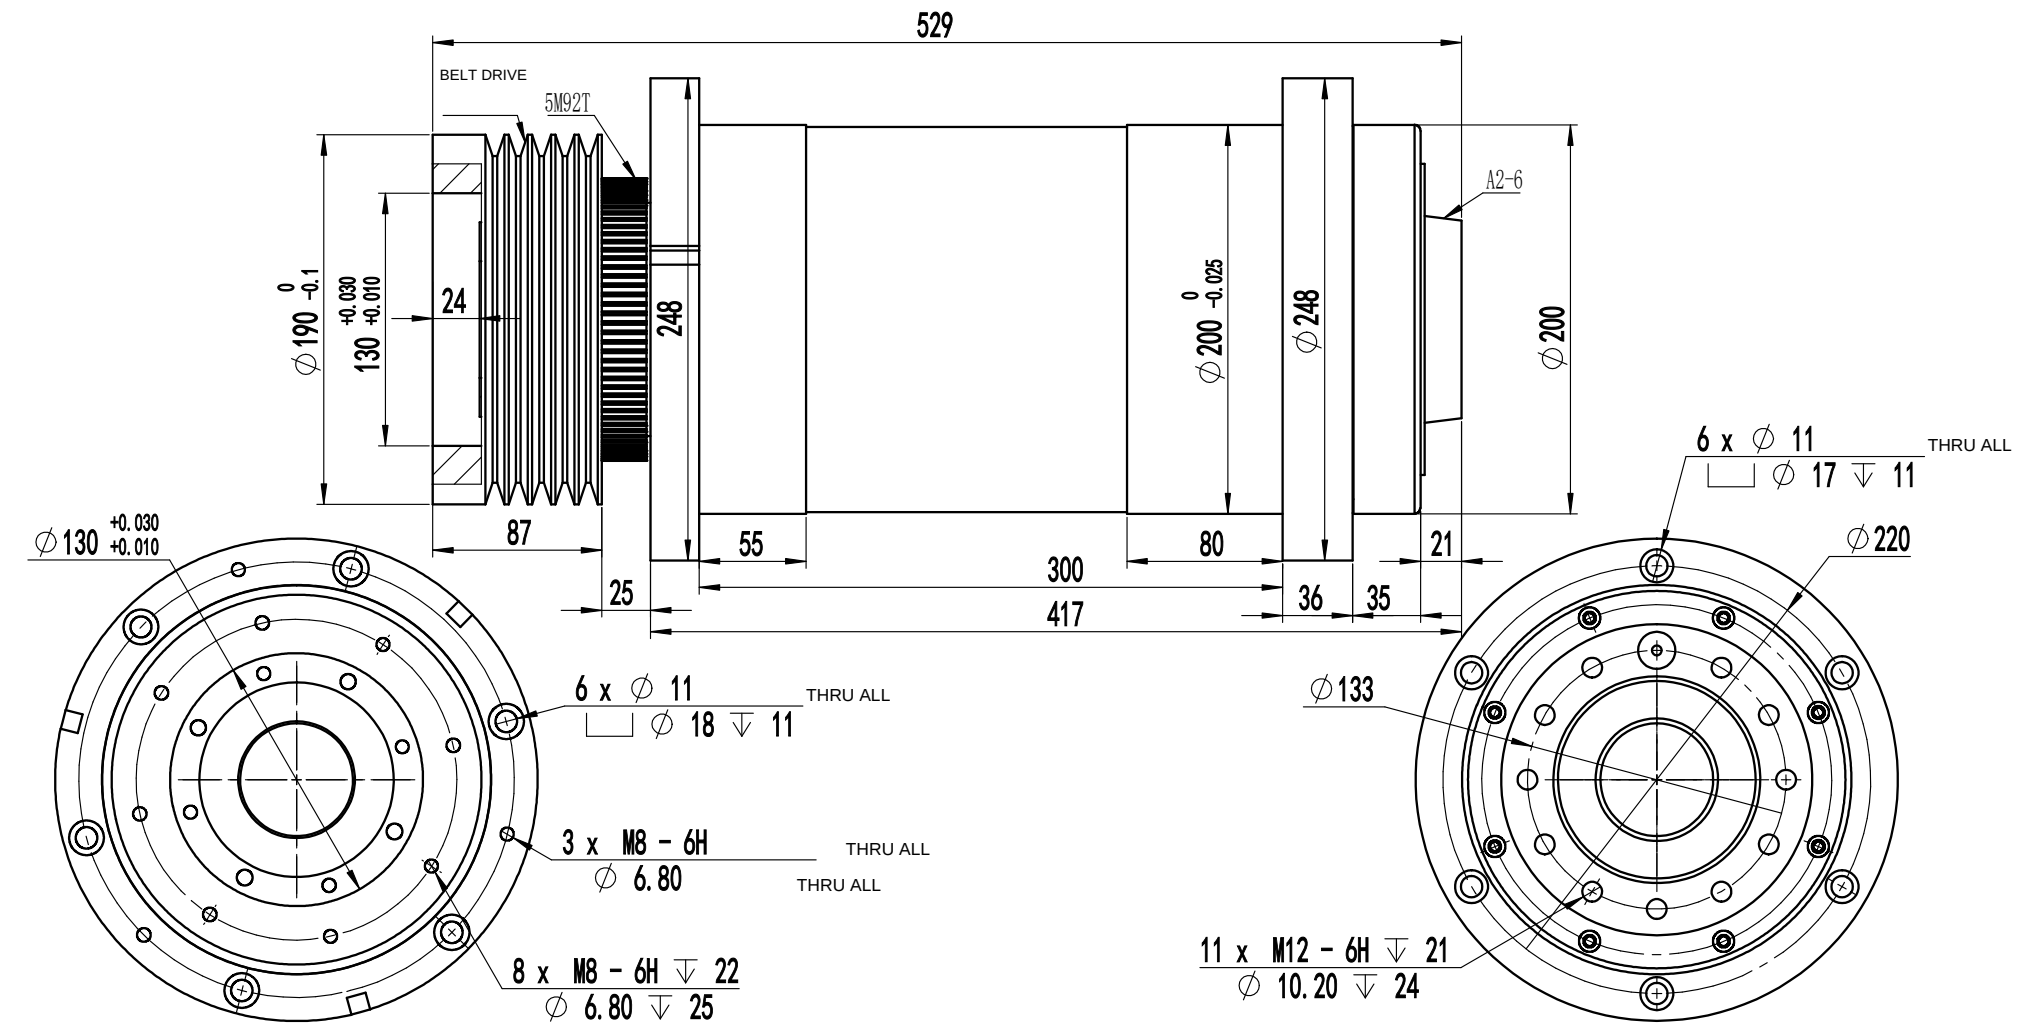

DRAWN

TECHNICAL INFORMATION		A2-6-200 BELT DRIVE			
BEARING TEMPERATURE RISE	AMBIENT +20 deg	SPINDLE NOSE RUNOUT	0.003 mm	MAXIMUM SPINDLE POWER	15KW
MAXIMUM SPEED	5000 RPM	BEARING SPECIFICATION	FRONT NN3021K+7021*2 REAR NN3020K	BALANCE GRADE	G1
DRIVE TYPE	BELT DRIVE	FLANGE FACE RUNOUT	0.003 mm	MAXIMUM SPINDLE TORQUE	95N-m
SPINDLE BORE DIAMETER	Ø65	BEARING LUBRICATION	GREASE	MOUNTING	HORIZONTAL