
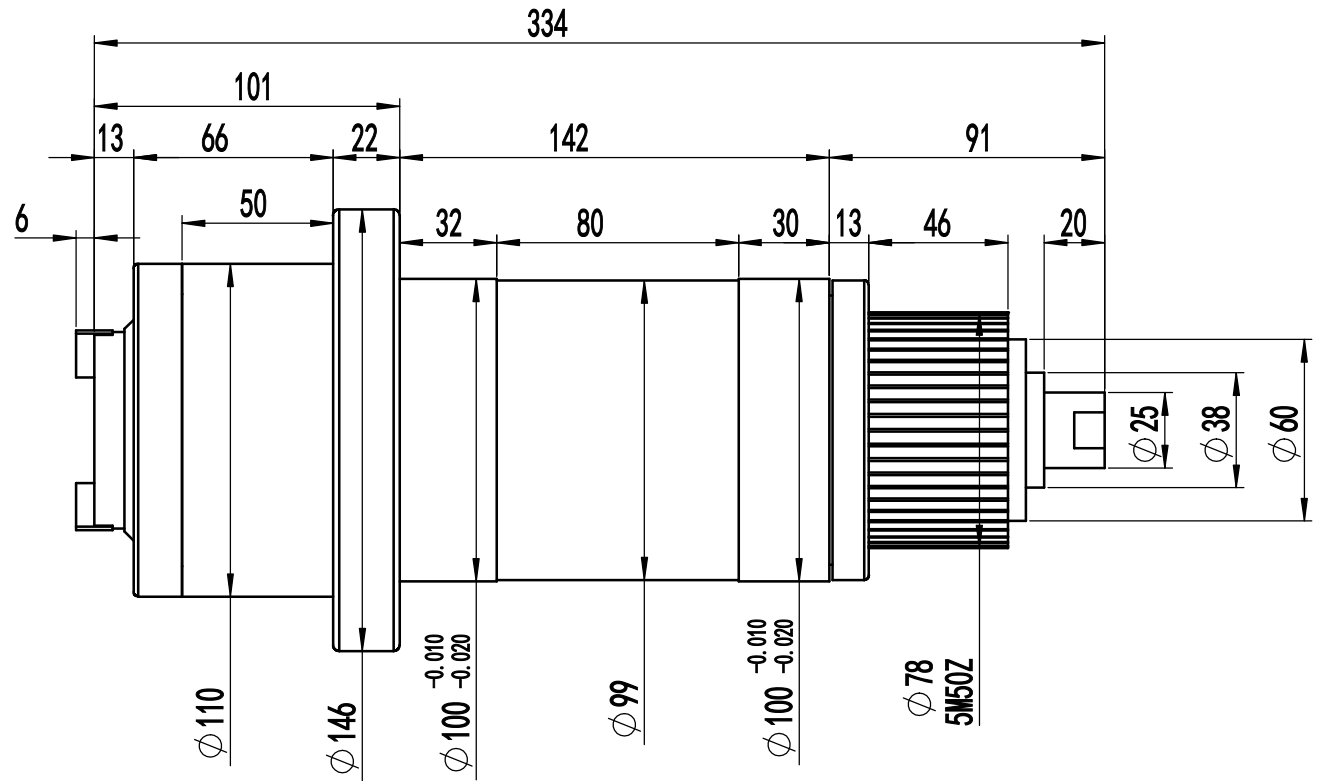


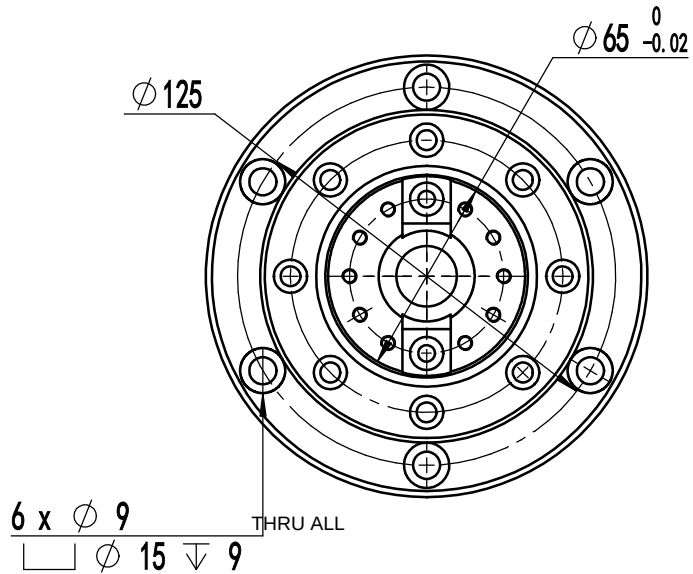

TECHNICAL INFORMATION		STANDARD 30-100			
SPECIFICATION	BT30-100	BEARING SPECIFICATION	FRONT 7009*3 REAR 7008*2	DRIVE TYPE	BELT DRIVE(5M50T)
TOOL CLAMPING	4-SEGMENT GRIPPER	TAPER RUNOUT	0.002 mm	BALANCE GRADE	G1
MAXIMUM SPEED	6000 RPM	BEARING LUBRICATION	GREASE	DRAWBAR FORCE	500 kg+/-50
THROUGH-SPINDLE COOLANT	OPTIONAL	TEST BAR RUNOUT AT NOSE	0.003 mm	MOUNTING	VERTICAL
TOOL HOLDER TAPER	BT30	BEARING TEMPERATURE RISE	AMBIENT +20 deg		
COOLING	OPTIONAL	TEST BAR RUNOUT AT 300 MM	0.008 mm		