


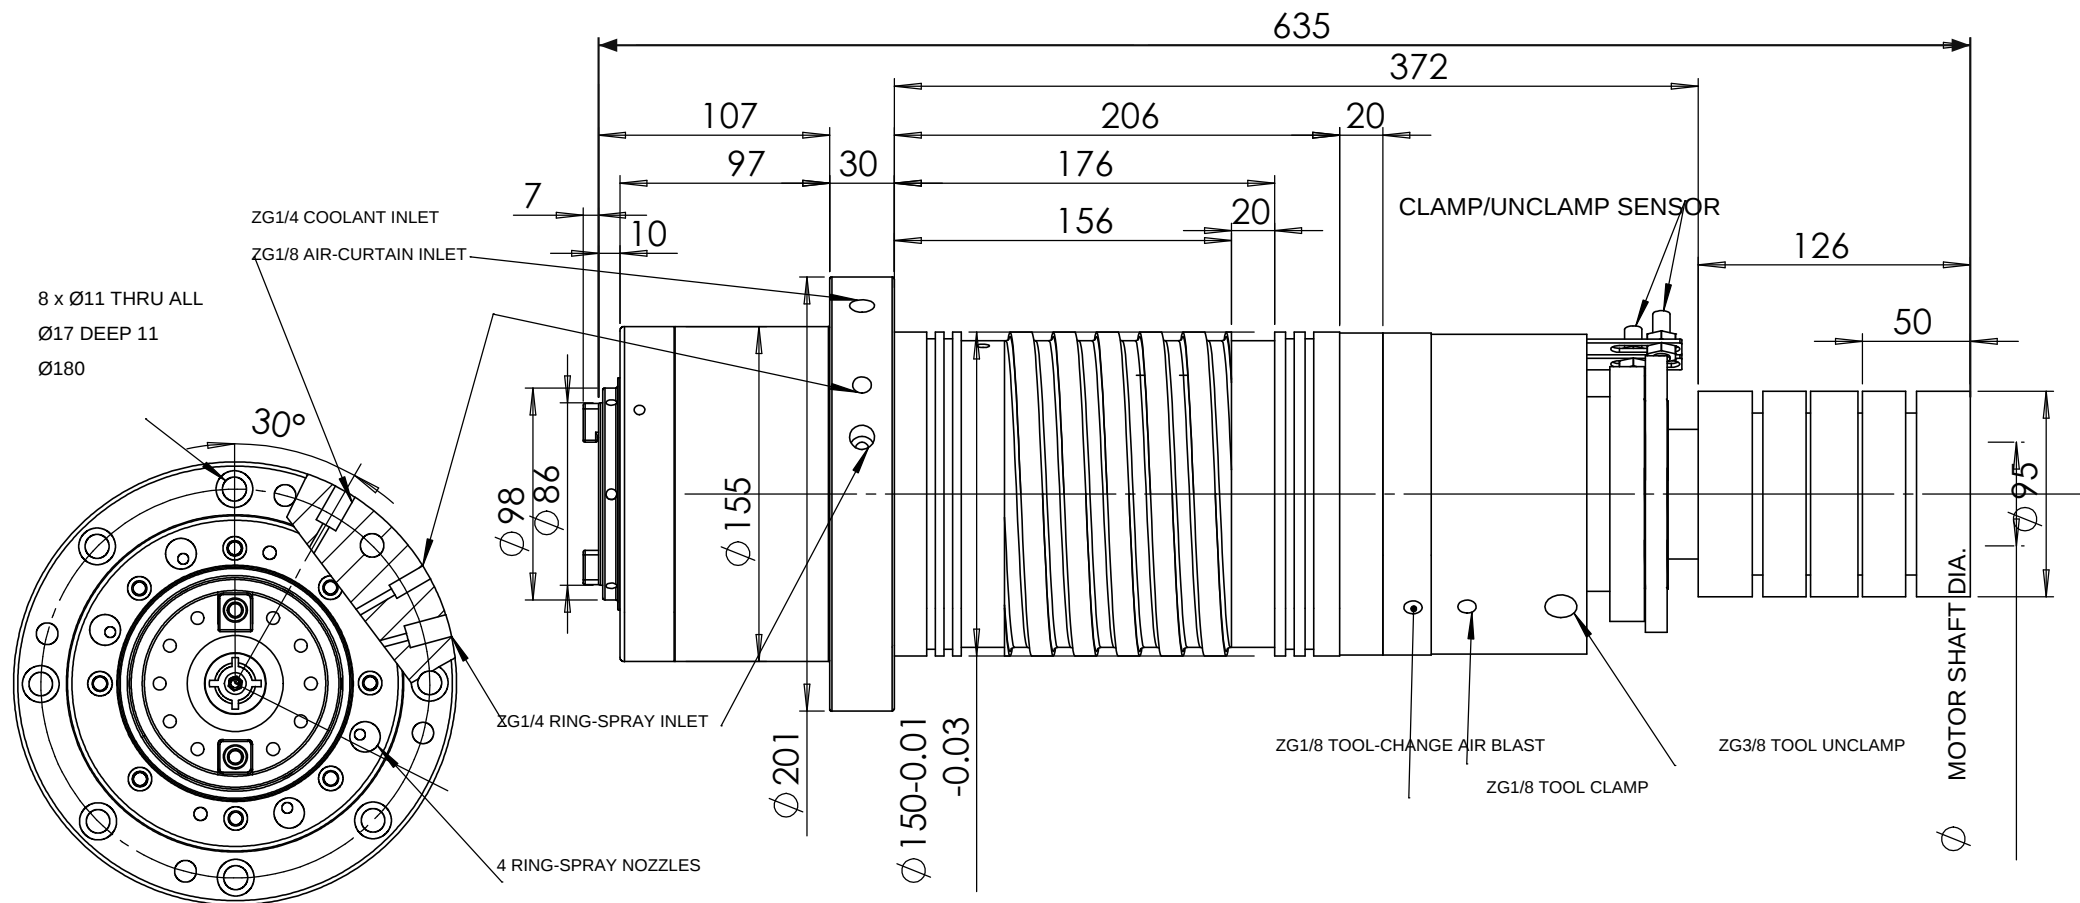

TECHNICAL INFORMATION		BT40-150 LONG-NOSE DIRECT DRIVE, FLOATING UNCLAMP			
SPECIFICATION	BT40-150	OIL PRESSURE	Kg/cm2(0.6Mpa)76	TAPER RUNOUT	0.002mm
MAXIMUM SPEED	12000 RPM	DRIVE TYPE	DIRECT DRIVE	TEST BAR RUNOUT AT NOSE	0.003mm
TOOL HOLDER TAPER	BT40	OIL VOLUME	110cc	TEST BAR RUNOUT AT 300 MM	0.008mm
BEARING SPECIFICATION	FRONT 7014*2 / REAR 7014*2	OIL VOLUME	<100CC	AIR-CURTAIN PRESSURE	0.1-0.15MPa
BOOSTER CYLINDER	ZYQ12110	DRAWBAR FORCE	100kg	BALANCE GRADE	G1
BOOST RATIO	12.7	TOOL CLAMPING	4-SEGMENT GRIPPER		
LUBRICATION	GREASE LUBRICATION	COOLING	OIL COOLING		