


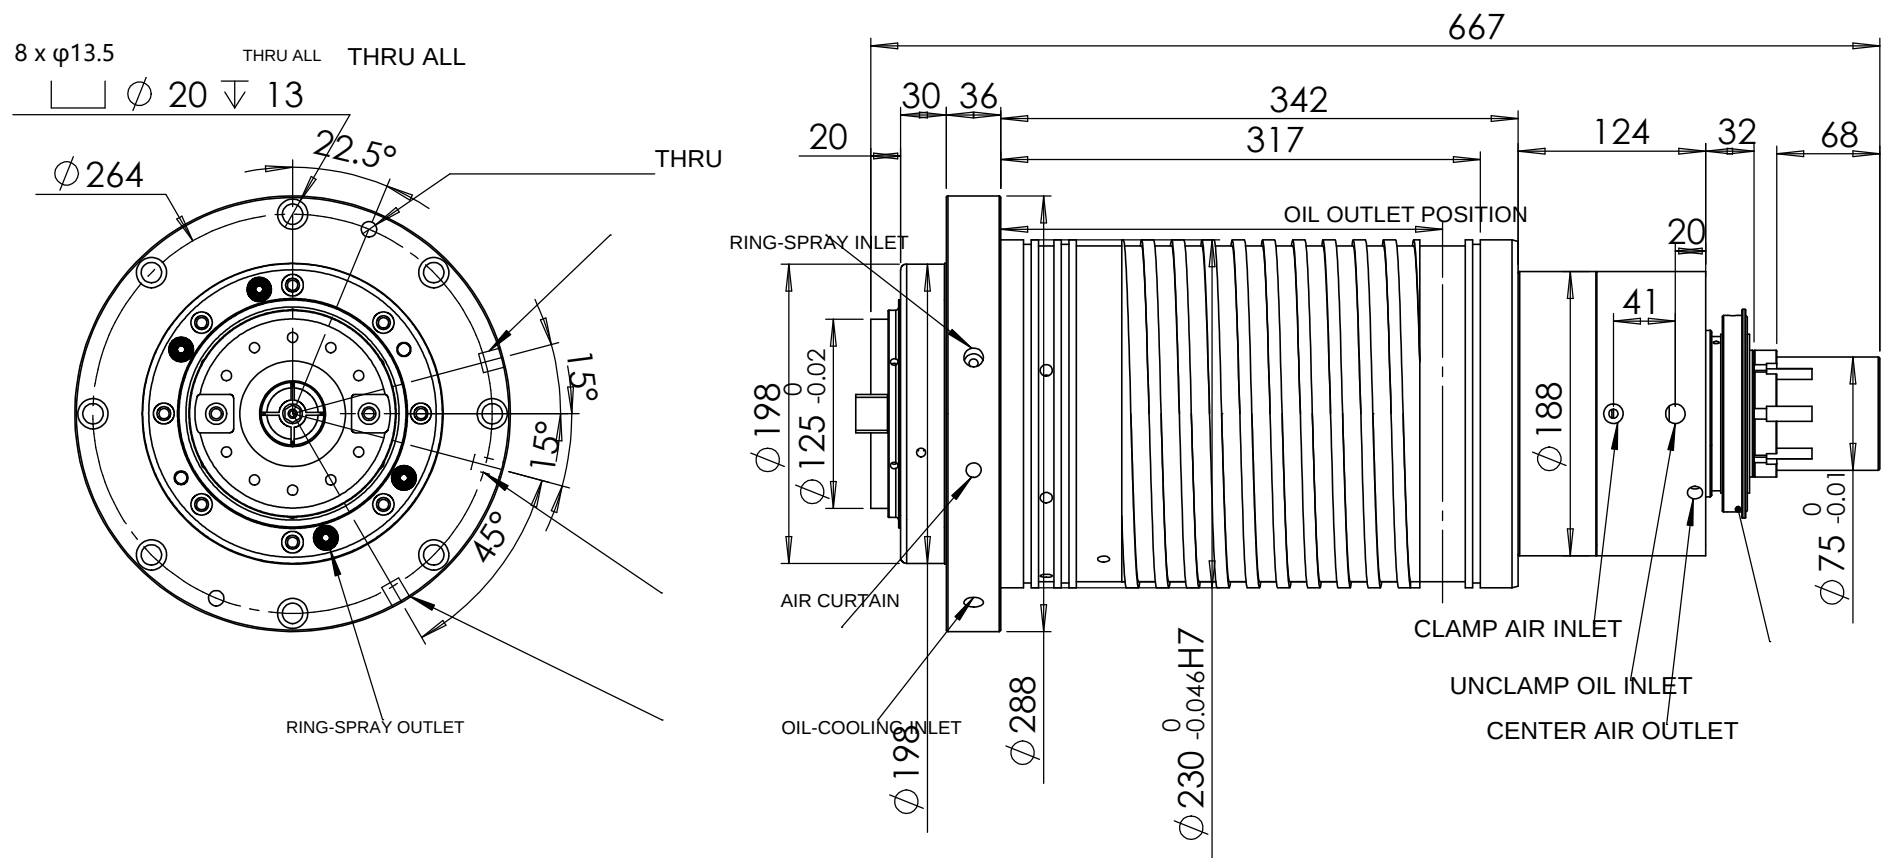

TECHNICAL INFORMATION		BT50-230 SHORT-NOSE DIRECT DRIVE, HYDRAULIC UNCLAMP, RING SPRAY
SPINDLE SPECIFICATION	BT50-230	
DRIVE TYPE	DIRECT DRIVE	
MAXIMUM SPEED	3000 RPM	
BEARING SPECIFICATION	NN3020*1 / 7020*4	
TEMPERATURE RISE	AMBIENT +25 C	
DRAWBAR FORCE	1500 kg +/-10%	